




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A01K 11/00	A1	(11) International Publication Number: WO 95/17809 (43) International Publication Date: 6 July 1995 (06.07.95)
(21) International Application Number: PCT/IE94/00062 (22) International Filing Date: 30 December 1994 (30.12.94) (30) Priority Data: S931017 31 December 1993 (31.12.93) IE (71)(72) Applicants and Inventors: KILROY, Michael, Maxwell [IE/IE]; Castlecor, Oldcastle, Co. Meath (IE). STAFFORD, Rodney, Arthur [IE/IE]; Ballyross, Glencree, Co. Wicklow (IE). (74) Agents: O'SULLIVAN, Gearoid, Patrick et al.; Tomkins & Co., 5 Dartmouth Road, Dublin 6 (IE).	(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), ES, FI, FI (Utility model), GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LT, LU, LV, MD, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, SK (Utility model), TJ, TT, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: ELECTRONIC ANIMAL IDENTIFICATION DEVICE

(57) Abstract

A bolus for administration to a ruminant animal so as to be retained in the rumen or reticulum of the animal has an electronic identification device housed therein, and is provided with ballast so as to possess the necessary specific gravity of 2 or greater. The ballast is in the form of a substantial weight, for example of metal, provided at one extremity of the bolus so that the centre of gravity of the bolus is near said extremity, to the extent that the bolus tends to adopt a vertical orientation in a semi-solid floating layer contained within the rumen or reticulum and to sink rapidly through the semi-solid floating layer, thus reducing the risk of regurgitation. The specific gravity of the bolus is at least 2.7, preferably 3.5 or greater. The centre of gravity is at least three fifths of the way along the length of the bolus, preferably three quarters of the way along the length.

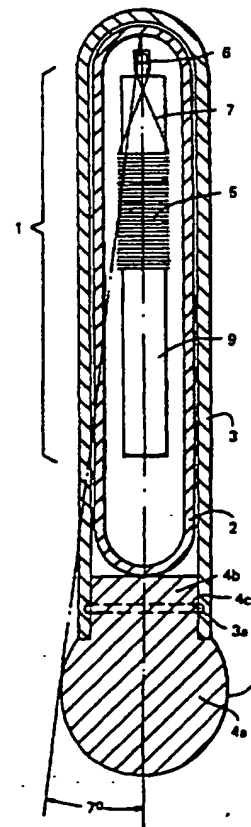

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

- 1 -

5

10

15 ELECTRONIC ANIMAL IDENTIFICATION DEVICETechnical field

20 The present invention relates to electronic devices for use in identification of ruminant animals, particularly cattle or sheep. The invention relates in particular to a bolus for administration to a ruminant animal so as to be retained in the rumen or reticulum of the animal, the bolus including an electronic animal identification device housed therein.

25

In this context "electronic" should be given a wide interpretation to include all forms of device making use of or responding to electromagnetic radiation.

30 Prior Art

United States Patent No. 4,262,632 to Hanton et al. describes an electronic identification system for livestock comprising a transmitter bolus which may be orally administered to an animal and which may be
35 made to reside in the second stomach or reticulum by weighting to produce the proper specific gravity. Hanton et al. teach that the particular specific gravity required may vary somewhat for different animals, but that little success is achieved with values of less than

- 2 -

about 1.5 specific gravity, successful retention has been achieved with specific gravities of 1.7, and permanent retention is assured with specific gravities of 2 or greater. Hanton et al. describe and illustrate a generally cylindrical bolus containing electronic components, a battery or other energy storage device, and ballast to ensure the necessary specific gravity. In Figure 4 Hanton illustrates a bolus in which the electronic components are located generally in one half of the bolus and the ballast and battery or energy storage are located generally in the other half of the bolus.

10

WO 93/05648 in the names of the present Applicants describes a bolus including an electronic identification device and further including a permanent visual representation of the animal identification so as to assist in proper identification when the bolus is retrieved from a dead animal.

15

Concurrent Art

In the following paragraphs a number of patent applications are acknowledged which were filed before but published after the claimed priority date of the present application.

20

AU-649212-A to Brady describes an animal identification apparatus comprising a passive transponder enclosed in a porcelain capsule with a specific gravity of 1.75 or greater and containing a magnetic plug for ensuring recovery after slaughter. The capsule is filled with a settable liquid to provide the desired specific gravity as well as to provide for the transponder to be held in an operative position within the capsule.

25

WO 94/22295-A in the name Miyawaki describes an internal individual identification apparatus for animals used so that the apparatus stays in a live body of a domestic animal without hurting the live body, the apparatus being formed so that the apparatus can be recovered easily after the domestic animal has been slaughtered. The apparatus rests in the first or second stomach of a ruminant animal. Various constructions are illustrated. Figure 4 illustrates a capsule or bolus including electronic components occupying a little over half

30

35

- 3 -

of the volume thereof, and a weight occupying some of the remaining volume, the weight being intended to keep the bolus in the stomach. Figure 5(a) illustrates a similar construction, the electronic components being different. Figure 6(a) illustrates a very different arrangement, in this construction spreadable "wings" are provided which open out after the bolus has entered the animal, so as to prevent regurgitation.

NL-920 1527 in the name Nedap acknowledges Hanton's teaching relating to specific gravity and proposes that the weight be unequally divided over the length of the bolus. As shown in Figure 1 of Nedap, which is not to scale, the stomach contains liquid with a semi-solid layer floating thereon. Nedap proposes that the inequality of weight distribution of the bolus be such that the bolus should tend to adopt a vertical orientation in the liquid. The purpose of this vertical orientation is to facilitate signal reading using a reading device located on the floor beneath the animal. Figure 3 illustrates a construction in which the bolus contains ballast extending from one end (the lower end) along approximately half the length of the bolus. Figure 4 illustrates an alternative construction in which the bolus is encased in an outer casing made up of two parts, a first (upper) part of light plastic material extending over slightly more than half the length of the bolus, and a second (lower) part of heavier ceramic material extending over the remainder of the length of the bolus. In each construction the upper part of the bolus necessarily has a specific gravity of less than approximately one (<1) so as to float in the liquid and the capsule has an overall specific gravity of between 1.7 and 2, at or below the lower limit proposed by Hanton.

30 Object and Summary of the Invention

We have found that a bolus of specific gravity greater than 2 generally sinks to the bottom of the rumen or reticulum, and is retained. However, we have also found that in a small but nevertheless significant number of cases, the animal very quickly regurgitates the bolus, particularly animals which are old enough to ruminate and are being fed on a high fibre diet. The number of cases in which regurgitation takes place may be small, perhaps only a few percent of

- 4 -

cases, but even this number is unacceptable bearing in mind that animal identification techniques are used to combat fraud and in disease control.

- 5 An object of the present invention is to reduce the incidence of regurgitation.

10 The invention provides a bolus for administration to a ruminant animal so as to be permanently retained in the rumen or reticulum of the animal, the bolus having an electronic identification device housed therein, the bolus being provided with ballast so as to possess the necessary specific gravity of 2 or greater, characterised in that the ballast is in the form of a substantial weight provided at one
15 extremity of the bolus so that the centre of gravity of the bolus is near said extremity, to the extent that the bolus tends to adopt a vertical orientation in a semi-solid floating layer contained within the rumen or reticulum.

20 It is believed that the reason some animals very quickly regurgitate the prior art boluses is that the boluses may take some time, for example several hours, to sink through the contents of the rumen or reticulum, in particular through the heavier semi-solid layer floating on the lighter liquid layer. It is believed that it is during these few hours that the risk of regurgitation exists. A bolus
25 according to the invention should tend towards the vertical in the semi-solid layer and sink much more rapidly and accordingly the risk of regurgitation should be greatly reduced.

30 The bolus of the invention may be contrasted with various boluses previously described. In the Brady bolus the weight is almost exactly evenly distributed and the specific gravity is 1.75. In the Hanton bolus, and likewise the Miyawaki bolus, because of the arrangement of the various components within the bolus, the weight is probably located more towards one end, but no special significance is attached to the
35 weight distribution. In the Nedap bolus the weight is intentionally distributed unevenly, but only to the extent necessary to tend towards a vertical position when floating in liquid, and the overall specific gravity is less than 2. None of the prior art or concurrent applicants appears to have appreciated the importance of rapid sinkage through the

- 5 -

semi-solid layer in the rumen.

Preferably the ballast is in the form of a high density material, to minimize the size thereof.

5

Preferably the high density material is in the form of solid metal. None of the prior art or concurrent applicants has suggested the use of solid metal through which radio frequency signals will not readily pass.

10

Preferably, the bolus has a centre of gravity more than three fifths, preferably more than two thirds and even more preferably more than three quarters way along the length thereof.

15

Preferably the overall specific gravity of the bolus is equal to or greater than approximately 2.7, even more preferably is equal to or greater than approximately 3.5.

20 Preferably the bolus is adapted to be received in the barrel of a balling gun so that the weight is at the open or leading end of the barrel, to facilitate correct orientation.

25 Preferably a gap is provided between electronic components forming part of the electronic identification device and the weight such as to ensure minimum interference with the reading range of a scanner used to read the identification device. It is desirable to reduce any "blind spot" as much as possible because it is envisaged that boluses according to the invention will be read automatically by a stationary scanner. For example the scanner may be mounted on or adjacent a
30 cattle crush, and a line of cattle may progress one by one quickly through the cattle crush.

35 Preferably, the angle between the axis of the bolus and a line drawn from the furthest point of the electronic components through the outer edge of the weight is preferably not more than 11° (eleven degrees), even more preferably not more than about 7° (seven degrees).

Preferably, the weight is in the form of a head and neck, with the

- 6 -

neck engaged in an end of the bolus.

Preferably the bolus is made of glass to provide an effective moisture seal encased in a resilient or less fragile material such as plastics material to avoid any possibility of broken glass contacting the innards of a live animal.

Brief Description of the Drawings

The invention will now be described more particularly with reference to the accompanying drawings which show, by way of example only, a number of constructions of bolus according to the invention. In the drawings:

Figure 1 shows a first construction comprising a substantially cylindrical bolus in the vertical orientation which it adopts under its own weight, and is an axial mid section of the bolus except that the epoxy resin for holding the electronic components in position in the bolus is shown in non-mid section;

Figure 2 is similar to Figure 1, but shown without epoxy resin to reveal the electronic components which are not shown in section;

Figure 3 is a view of the first construction similar to that shown in Figure 1, but showing the bolus in an inclined orientation loaded into the barrel of a balling gun used to administer the bolus to an animal;

Figure 4 shows a second construction of bolus, loaded into a balling gun;

Figure 5 shows a third construction of bolus loaded into a balling gun;

Figure 6 shows a fourth construction of bolus loaded into a balling gun; and

Figure 7 shows a fifth construction of bolus loaded into a balling

- 7 -

gun.

Referring to Figures 1, 2 and 3 the bolus comprises electronic components generally designated 1 including a ferrite rod 9, coil 5, integrated circuit 6, connections 7 between coil and integrated circuit, which are well known from the prior art and will not be further described, a sealed inner shell 2 made of glass, an open ended outer shell 3 made of hard transparent plastics material which is resistant to attack by acids, for example one of the range of ULTEM (Trade Mark) engineering thermoplastics available from General Electric Plastics Europe based on polyetherimide resins, a metal weight 4 shaped in the form of a head 4a and a neck 4b, the latter being provided with external beading 4c which is a snap fit in a corresponding circumferential groove or grooves 3a in the internal surface of the outer shell 3, and a body of epoxy resin 8 for holding the electronic components in position.

Alternatively in a variant (not shown) the external beading may be part of the internal surface of the outer shell 3 with the corresponding groove or grooves being provided in the neck 4b.

As will be appreciated from Figures 1, 2 and 3, the centre of gravity is located near the end of the bolus at which the weight 4 is located so that when the bolus reaches the rumen or reticulum it will tend to adopt the vertical orientation as shown in Figures 1, 2 and 3. Also, as can readily be appreciated from Figures 1, 2 and 3, the weight 4 has a smooth surface. Thus the bolus encounters minimum frictional resistance when sinking through the contents of the rumen or reticulum and therefore sinks more rapidly.

30

Location of the weight 4 at the end of the bolus also reduces the likelihood of the material of the weight 4 interfering with radio signals to and from the electronic components 1. This likelihood of interference is minimized by the relative proportions of the diameter of the weight 4 to the distance between the weight 4 and the electronic components 1. These proportions should be such that the angle between the bolus axis and a line drawn between the furthest end of the electronic components 1 and the outer edge of the weight 4 should not

35

- 8 -

be greater than 11° .

The weight 4 may be made of any physiologically acceptable material of sufficient density to achieve the required specific gravity, centre of gravity and total weight without unduly enlarging the bolus so that it may be safely administered to smaller ruminants such as calves and sheep. Examples of suitable materials may include copper, mild steel and stainless steel. Use of such materials would also enable detection of the presence of a bolus with a metal detector in the unlikely event of any failure of the electronic components 1.

According to a further feature of the invention the weight 4 may be made of a material which is attracted to a magnet. One example of a possible material is mild steel. This feature facilitates retrieval of the bolus after slaughter if required. However this feature is not recommended if the bolus is to be used for fraud prevention, as the provision of a material which is attracted to a magnet could facilitate removal of the bolus from a live animal.

Referring now to Figure 3, the bolus is shown located in the barrel of a balling gun. The drawing shows the barrel 10 and the plunger 11. The drawing emphasises the extent to which the ballast is in fact concentrated at one end of the bolus, only just penetrating into the open end of the barrel 10 and having a maximum diameter greater than the internal diameter of the barrel 10. Also, from the drawing it will be appreciated that this ensures that the bolus is administered to the animal with the weight 4 at the leading end thereof, thereby facilitating the correct orientation of the bolus for rapid sinkage. The bolus is retained in the barrel 10 by being a sufficiently tight friction fit.

Referring now to Figure 4, the second construction differs from the first construction in that the outer shell 3 of plastics material completely surrounds the weight 4. The outer shell 3 is in two parts and the joint between these two parts is located at the widest part of the outer shell 3 to allow assembly. The joint may be in the form of a circumferential equatorial bead and groove or may be jointed using a method such as sonic welding or with a solvent or adhesive.

- 9 -

Referring now to Figure 5, the third construction differs from the first construction in that no glass inner shell is provided. Epoxy resin or other plastic 60 is provided which surrounds and protects the electronic components 1, and the resin 60 is poured directly into the

5 "ULTEM" shell 3.

Referring now to Figure 6, the fourth construction differs from the first construction in that the weight 4 has a "bullet" shape and is completely surrounded by plastics material shell 3 which is contained

10 in the barrel 10 as a sufficiently tight friction fit.

Referring now to Figure 7, the fifth construction differs from the first construction in that neither an inner nor an outer shell is provided, instead the electronics components (not shown in Figure 7)

15 are integrally moulded into a solid block 70 of plastic or resin.

Product Specification For Live Testing Using 50 g Weight (Figures 1, 2 and 3)

20 By way of example, typical measurements of a bolus for use in cattle are as follows:

Bolus (including outer casing in plastics material and ballast weight): overall length 105 mm, greatest diameter 22 mm.

25

Stainless steel ballast weight (overall): 22 mm greatest diameter, 26 mm in length, weight 50 g.

Sealed glass case housing electronic components: 13 mm diameter x

30 75 mm in length, weight approximately 22 g, specific gravity approximately 2.0.

Plastic casing (overall) to which ballast weight is attached: 89 mm long x 18 mm diameter, with an average wall thickness of

35 preferably not more than 2 mm.

In the assembled bolus the centre of gravity is approximately three-quarters way along the length of the bolus. The angle between

- 10 -

the longitudinal axis of the bolus and a line drawn between the furthest end of the electronic components 1 is approximately 7° (seven degrees) (see Figure 2). The specific gravity is approximately 3.5. The total weight is approximately 84 g.

5

For smaller ruminants such as sheep the boluses may be smaller but should retain approximately similar proportions, specific gravity, centre of gravity and ratio of weight to surface area of the larger model.

10

Live Test Results

A preliminary study using glass encapsulated boluses with a specific gravity of 2.0 met with only limited success.

15

Since the priority application IES931017 was filed tests have been carried out using the constructions described above. The results have become available, and these are described below.

20

500 glass encapsulated electronic boluses were used for the study, some of which were recovered and reused so that more than 500 cattle were tested. The boluses were encapsulated in plastic casing, incorporating at one end a stainless steel weight of 23, 30 or 50 g. This provided a bolus with a specific gravity above 2.7.

25

A weighted bolus was administered orally to 544 cattle, aged 0.5 to 60 months. The added stainless steel weights incorporated in the boluses were: 23 g (41 cattle), 30 g (172 cattle) and 50 g (331 cattle). Boluses with 50 g weights correspond to Figures 1, 2 and 3 and are fully described under "Product Specification for Live Testing Using 50 g Weight (Figures 1, 2 and 3)", whereas boluses with 23 g and 30 g added weights correspond to the construction briefly described with reference to Figure 6.

30

Readings were taken at intervals after administration. A bolus was deemed a failure if it could not be read.

Tables 1 to 9 summarise the results. Bolus recovery at slaughter

- 11 -

presented no problems: all were recovered from the reticulum or from the area immediately nearby and it did not prove necessary to employ a magnet. Before removing ruminal digesta, boluses were removed easily via a small incision through the ruminal or reticular wall. To date, 5 boluses with the 23 g added weight had a success rate of 97.6% (40/41) reading, 2.4% loss, (Table 1). Boluses with the 30 g added weight had a success rate of 97.7% (168/172) reading (Tables 2 to 5 and 10). Boluses with the 50 g added weight had a success rate of 99.7% (330/331) reading (Tables 6 to 10).

10

Conclusions

A weighted ruminal plastic bolus, encapsulating an electronic transponder, was highly successful as a method of tamper-proof 15 electronic animal identification.

Boluses which incorporated a 23 g weight were 97.6% successful; the 2.4% loss (in 1/41 cattle) occurred before Day 3.

20 Boluses which incorporated a 30 g weight were 97.7% successful to date (168/172 cattle). The 2.3% loss occurred some time after Day 30 and may have been due to the outer casings coming apart due to wear as the plastic caps were slightly loose before insertion in the animals. Two of the boluses recovered from the 57 slaughtered animals (Table 2) 25 had in fact lost their outer casings and weights.

Boluses which incorporated a 50 g weight were 99.7% successful (in 330/331 cattle). It has not yet been ascertained whether the one bolus which is not reading is still inside the animal. There is a 30 possibility that the glass casing may have been cracked during assembly, allowing moisture to penetrate.

Recovery of the boluses at slaughter presented no problems: all were located and removed within seconds.

35

The type of diet on which the animals were fed at time of insertion did not influence retention and reading rate. At the time of insertion in the 544 cattle, 227 were indoors on a diet of grass

- 12 -

silage, 208 were at pasture on a diet of grass only, 12 were indoors on a diet of 75% barley straw, and 97 (calves) were indoors on a diet of milk replacer and concentrate.

5

TABLE 1

The retention and reading rates for plastic encapsulated electronic rumen transponders incorporating a 23 g added weight are set out below. The boluses were inserted into cattle weighing 500 kg and the cattle were slaughtered five months later.

		Number Reading	Percentage Reading
15	Day 1	41	100
	Day 3	40	98
	Day 7	40	98
	Day 14	40	98
	Day 150	40	98
20			

TABLE 2

The retention and reading rates for plastic encapsulated electronic rumen transponders incorporating a 30 g added weight are set out below. The boluses were inserted into cattle weighing 480 kg and the cattle were slaughtered five months later.

		Number Reading	Percentage Reading
30			
	Day 1	57	100
	Day 3	57	100
35	Day 7	57	100
	Day 14	57	100
	Day 130	57	100

- 13 -

TABLE 3

The retention and reading rates for plastic encapsulated
 5 electronic rumen transponders incorporating a 30 g added weight are set
 out below. The boluses were inserted into steers of 8 months of age.

	Number Reading	Percentage Reading	
10	Day 1	54	100
	Day 3	54	100
	Day 7	54	100
	Day 14	54	100
	Day 260	54	100
	Day 330	54	100
15			

TABLE 4

20 The retention and reading rates for plastic encapsulated
 electronic rumen transponders incorporating a 30 g added weight are set
 out below. The boluses were inserted into adult beef cows.

25		Number Reading	Percentage Reading
	Day 1	40	100
	Day 3	40	100
30	Day 7	40	100
	Day 14	40	100
	Day 90	40	100
	Day 170	38	95
35			

- 14 -

TABLE 5

The retention and reading rates for plastic encapsulated
 5 electronic rumen transponders incorporating a 30 g added weight are set
 out below. The boluses were inserted into suckled beef-cross calves of
 2 to 3 months of age.

	Number Reading	Percentage Reading
10		
	Day 1	14
	Day 3	14
	Day 7	14
15	Day 14	14
	Day 30	14
	Day 105	12
		86

20

TABLE 6

The retention and reading rates for plastic encapsulated
 25 electronic rumen transponders incorporating a 50 g added weight are set
 out below. The boluses were inserted into cattle weighing 450 kg and
 the cattle were slaughtered three and a half months later.

	Number Reading	Percentage Reading
30		
	Day 1	75
	Day 3	75
	Day 7	75
35	Day 14	75
	Day 115	75
		100

- 15 -

TABLE 7

The retention and reading rates for plastic encapsulated
 5 electronic rumen transponders incorporating a 50 g added weight are set
 out below. The boluses were inserted into calves of 2 weeks of age.

	Number Reading	Percentage Reading
10		
	Day 1	97
	Day 3	97
	Day 7	97
	Day 14	97
15	Day 190	97
	Day 250	96

20

TABLE 8

The retention and reading rates for plastic encapsulated
 electronic rumen transponders incorporating a 50 g added weight are set
 25 out below. The boluses were inserted into adult beef cows.

	Number Reading	Percentage Reading
30		
	Day 1	64
	Day 3	64
	Day 7	64
	Day 14	64
	Day 90	64
35	Day 170	64

- 16 -

TABLE 9

The retention and reading rates for plastic encapsulated electronic rumen transponders incorporating a 50 g added weight are set out below. The boluses were inserted into suckled beef-cross calves of 2 to 3 months of age.

	Number Reading	Percentage Reading	
10			
	Day 1	90	100
	Day 3	90	100
	Day 7	90	100
15	Day 14	90	100
	Day 30	90	100
	Day 105	90	100

20

TABLE 10

The retention and reading rates for plastic encapsulated electronic rumen transponders incorporating a 30 or 50 g added weight in animals offered a diet of 75% straw are set out below. The boluses were inserted into fattening heifers weighing 420 kg.

	Number Reading		Percentage Reading	
30				
	<u>Added Weight</u>	<u>30 g</u>	<u>50 g</u>	
	Day 1	7	5	100 100
	Day 3	7	5	100 100
35	Day 7	7	5	100 100
	Day 14	7	5	100 100
	Day 28	7	5	100 100

- 17 -

TABLE 11

The overall summary of retention and reading rate on the date of
 5 last reading for plastic encapsulated electronic rumen transponders
 incorporating a 23, 30 or 50 g added weight is set out below.

	<u>Added Weight</u>		
	<u>23 g</u>	<u>30 g</u>	<u>50 g</u>
No. Reading / No. used	40/41	168/172	330/331
Percentage reading	97.4	97.7	99.7

15

In addition to the tests on cattle described above, boluses with
 50 g weights according to Figures 1, 2 and 3 have recently been
 administered to five adult sheep. 60 days after administration the
 boluses continue to give readings.

20

Product Specification After Live Testing

After testing, some modifications are envisaged, and some features
 have been better understood and these are explained in the following
 25 paragraphs.

1) It is hoped that it will be possible to make just one size of
 bolus, which will be small enough to be administered to very small
 calves and yet heavy enough to sink through the rumen contents of adult
 30 animals on a high-fibre diet.

2) A stomach tube which is 20 mm diameter at its widest point has
 been used to feed colostrum directly into the stomach of the smallest
 newborn Jersey calves. It is believed that a problem which may arise
 35 in administering a 50 g weighted bolus to a very small calf is not just
 the diameter alone, but the combination of its diameter and length.
 This could make it difficult for the bolus to travel around the corner
 where the oesophagus meets the reticulum.

- 18 -

3) When the 50 g weight was designed a maximum diameter of 22 mm was chosen because it was the widest that could be used without an unacceptable reduction in reading range (from that end), and the spherical shape was chosen because it was desired to keep the overall length as short as possible, and minimise any discomfort for the animal. If the length of the bolus can be reduced, then the diameter of the weight should also be reduced.

4) It is possible to demonstrate mathematically how a large steel ball or sphere will sink more readily through a floating crust or "raft" than a smaller steel ball of equal density or specific gravity. As a convenient example, if one considers two spheres, one of 6 mm and the other of 24 mm diameter, and calculates the volume by multiplying the cube of the diameter (d^3) x 0.5236 and the surface area of both by multiplying the square of the diameter (d^2) x 3.1416, it can be seen that the volume or weight of the larger ball is 64 times greater than the smaller one.

There is a more important factor, however, and that is the ratio of weight to surface area. This is four times greater for the large sphere than for the small one. This is why the larger ball will sink more readily than the smaller one through a semi-solid layer. Accordingly, miniaturization of the bolus may not simply involve scaling down the dimensions of the bolus, it may be necessary to choose a more dense material for the weight, for example it may be necessary to use lead.

5) Three important factors have therefore been identified which influence the physical performance of the bolus, namely:

- (a) Centre of gravity;
- (b) Specific gravity;
- (c) Ratio of total weight to surface area of leading or heavy end of bolus.

6) It is believed that the heavy end of the bolus should travel first down the animal's throat and that it should not be possible to fit the bolus the wrong way round in the applicator. It is thought that the

- 19 -

outside diameter of the weighted end should be the same as that of the applicator. The larger the size of the weight, the more it will move the centre of gravity closer to the end of the bolus.

- 5 It will be appreciated that the invention is not limited to the specific details described herein which are given by way of example only, and that various alterations and modifications are possible within the scope of the invention.

10

15

20

25

30

35

- 20 -

CLAIMS

1. A bolus for administration to a ruminant animal so as to be retained in the rumen or reticulum of the animal, the bolus having an
5 electronic identification device housed therein, the bolus being provided with ballast so as to possess the necessary specific gravity of 2 or greater, characterised in that the ballast is in the form of a substantial weight provided at one extremity of the bolus so that the centre of gravity of the bolus is near said extremity, to the extent
10 that the bolus tends to adopt a vertical orientation in a semi-solid floating layer contained within the rumen or reticulum and to sink rapidly through the said semi-solid floating layer.
2. A bolus according to claim 1 in which the ballast is in the form
15 of a high density material.
3. A bolus according to claim 2 in which the high density material is a metal.
- 20 4. A bolus according to any one of the preceding claims in which the centre of gravity is more than three fifths way along the length thereof.
5. A bolus according to any one of the preceding claims in which the
25 centre of gravity is more than two thirds way along the length thereof.
6. A bolus according to any one of the preceding claims in which the centre of gravity is more than three quarters way along the length thereof.
- 30 7. A bolus according to any one of the preceding claims in which the specific gravity is equal to or greater than approximately 2.7.
8. A bolus according to any one of the preceding claims in which the
35 specific gravity is equal to or greater than approximately 3.5.
9. A bolus according to any one of the preceding claims adapted to be received in the barrel of a balling gun to ensure that the weight is at

- 21 -

the open or leading end of the barrel, to facilitate correct orientation.

10. A bolus according to any one of the preceding claims in which a
5 gap is provided between electronic components forming part of the
electronic identification device and the weight such as to ensure
minimum interference with the reading range of a scanner used to read
the identification device, the angle between the axis of the bolus and
a line drawn from the furthest point of the electronic components
10 through the outer edge of the weight being not more than 11° (eleven
degrees).

11. A bolus according to claim 10 in which the angle is equal to or
less than approximately 7° .

15

12. A bolus according to any one of the preceding claims in which the
weight is in the form of a head and a neck.

13. A bolus according to any one of the preceding claims made of glass
20 encased in a resilient or less fragile material such as plastics
material.

25

30

35

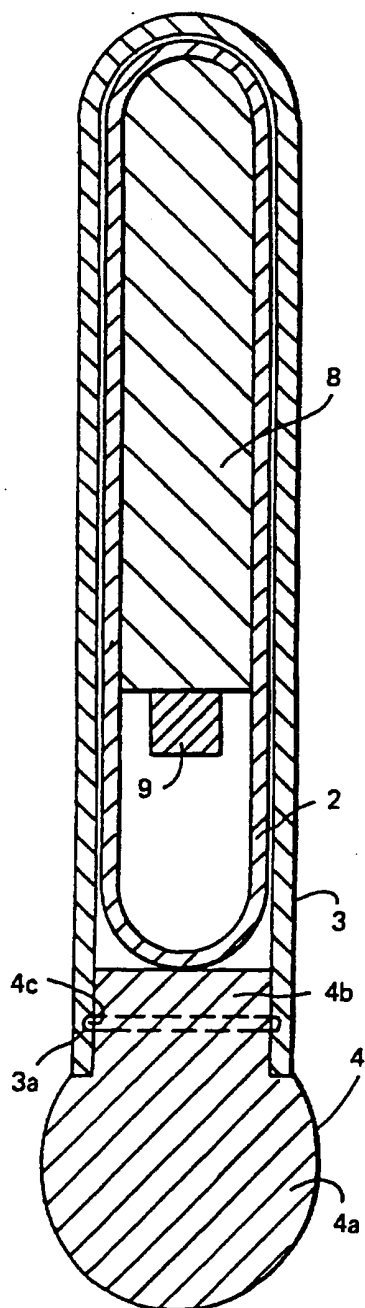


FIG. 1

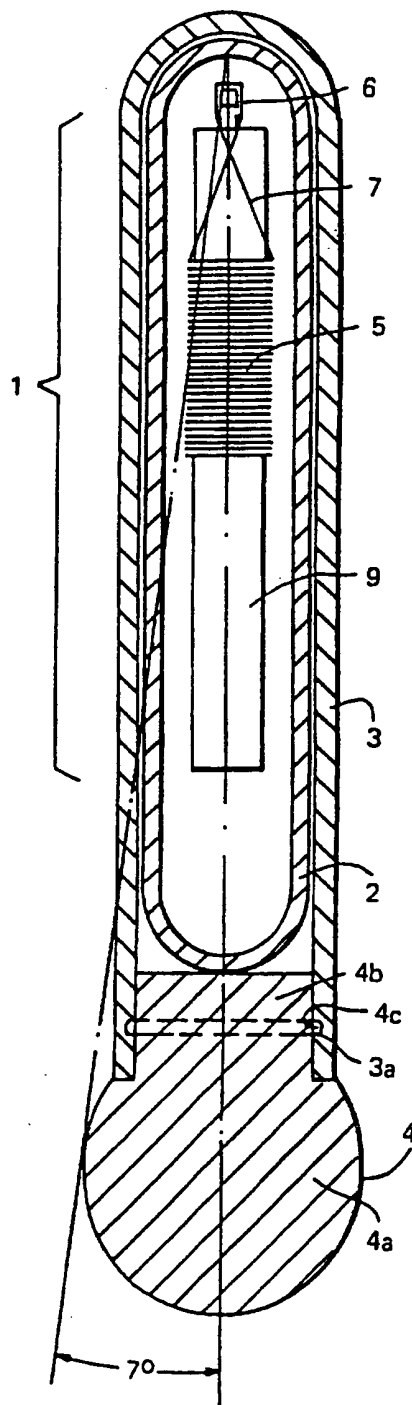


FIG. 2

2/4

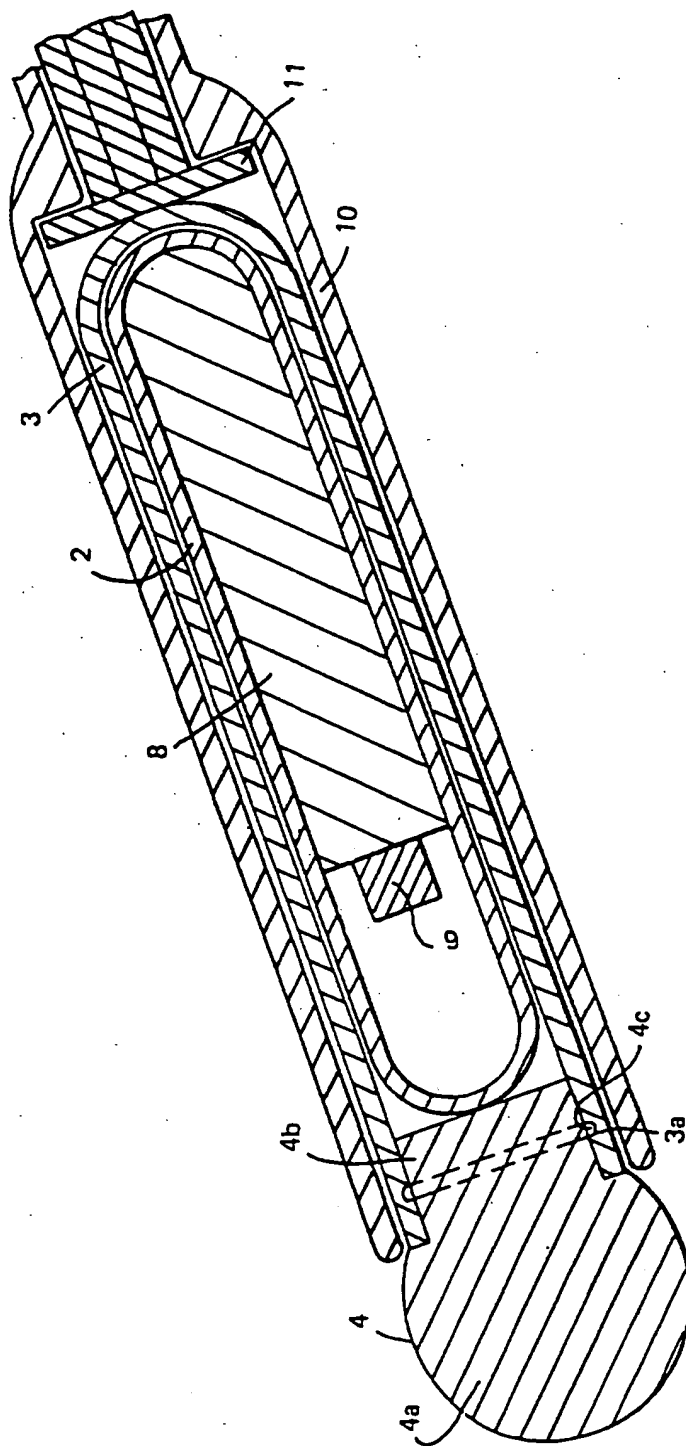


FIG. 3

3/4

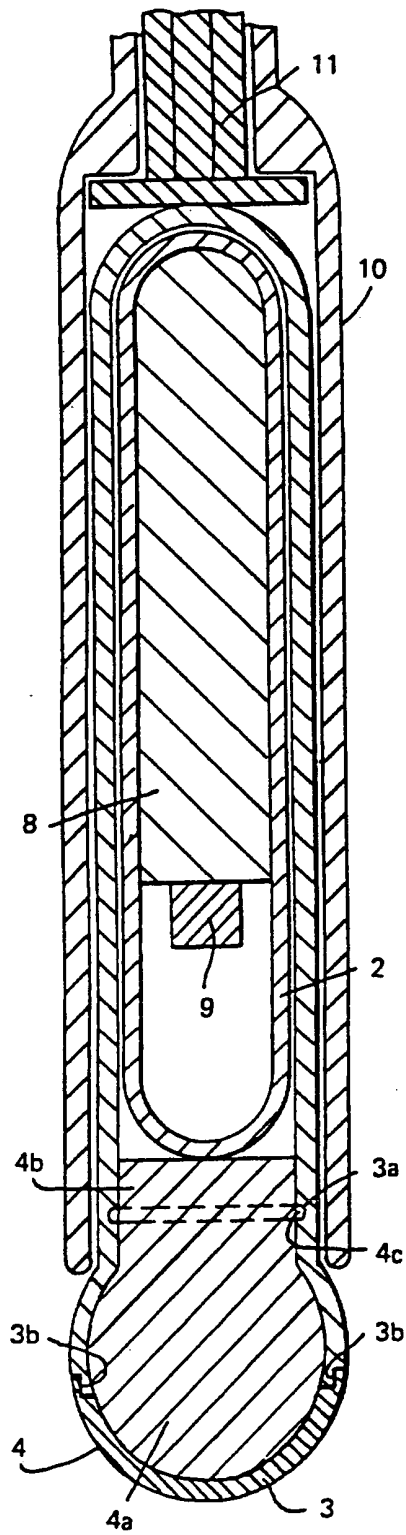


FIG. 4

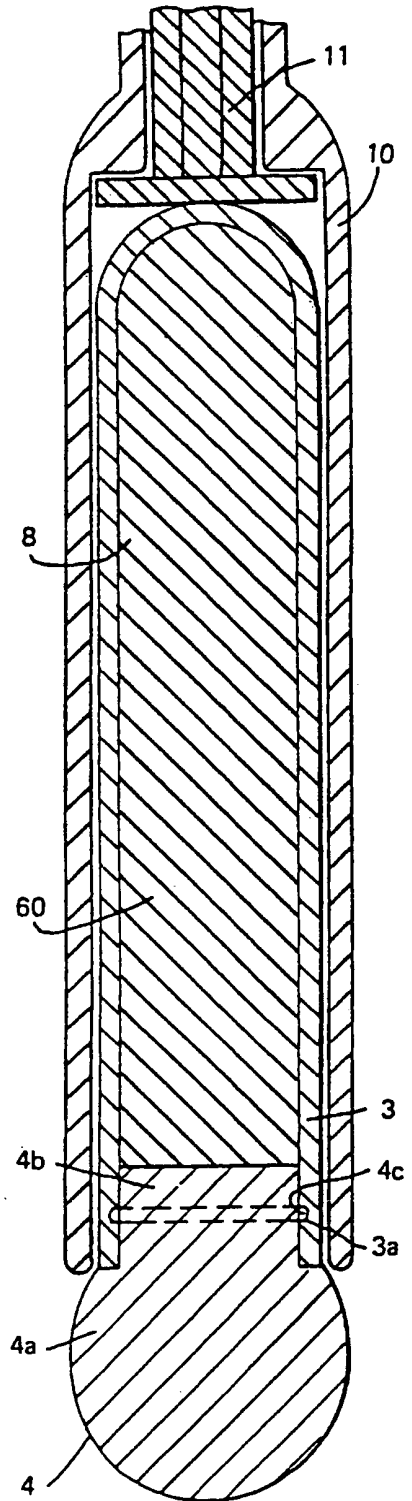


FIG. 5

4/4

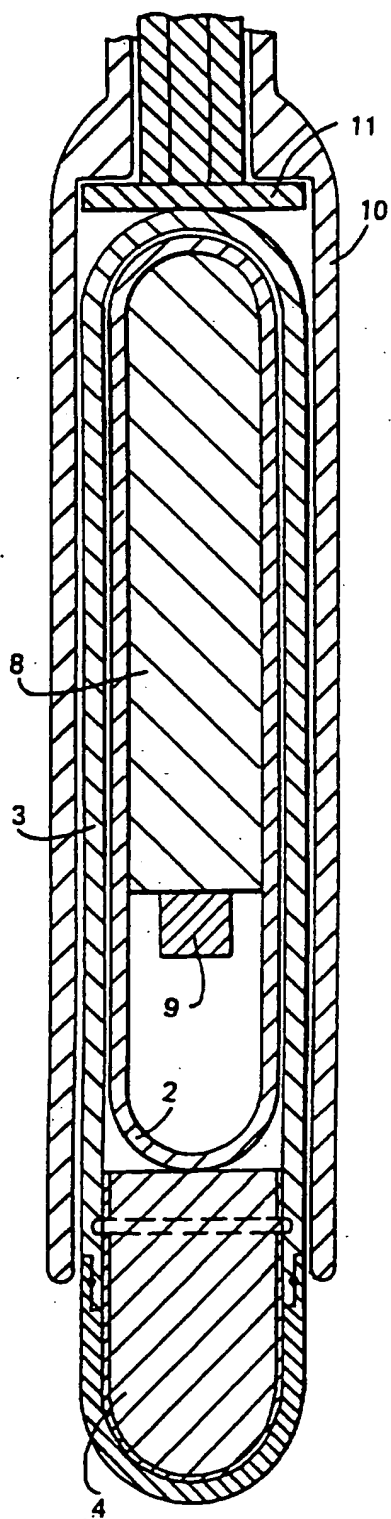


FIG. 6

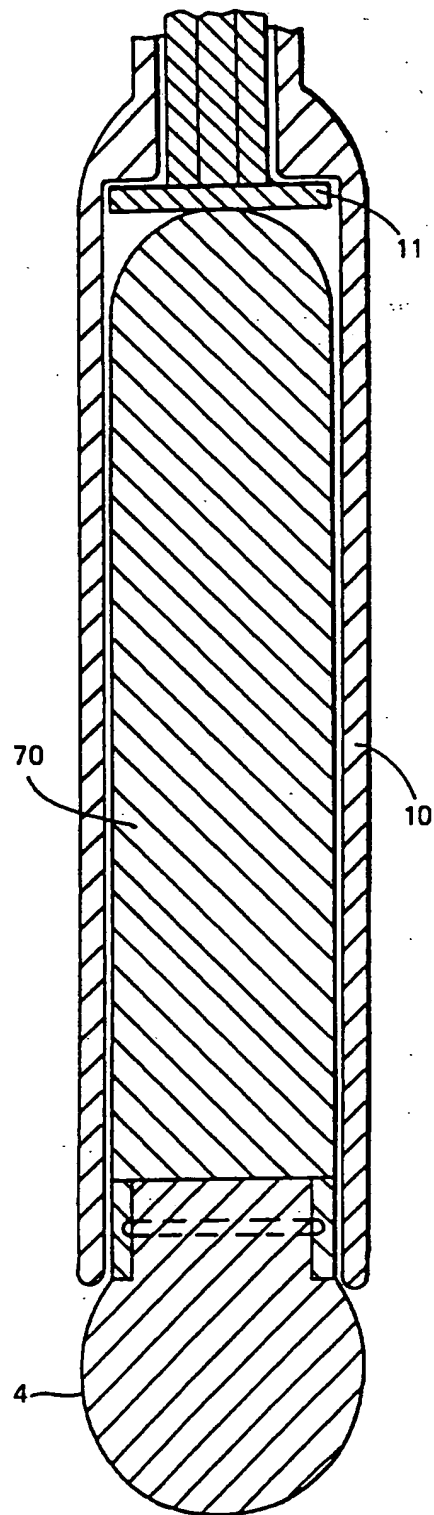


FIG. 7

SUBSTITUTE SHEET

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IE 94/00062

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: A01K 11/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: A01K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPAT, DIALOG, JAPIO

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US, A, 4262632 (J.P. HANTON ET AL), 21 April 1981 (21.04.81), column 2, line 55 - line 68; column 5, line 67 - column 6, line 5 --	1,2,9,10,13
Y	WO, A1, 9305648 (STAFFORD, R. A. ET AL), 1 April 1993 (01.04.93), page 6, line 39 - line 32; page 9, line 26 - line 29; page 12, line 27 - line 30, page 15, line 5 - line 12, page 16, line 37 - line 38, figure 15 --	1,2,9,10,13
P,Y	NL, A, 9201527 (N.V. NEDERLANDSCHE APPARATENFABRIEK "NEDAP"), 5 April 1994 (05.04.94), page 3, line 19 - line 28, figures 1-4 --	1,2



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

B earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

Z document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

20 March 1995

28.04.95

Name and mailing address of the International Searching Authority



European Patent Office, P.B. 5818 Patentaan 2
NL-2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 631 epo nl
Fax (+31-70) 340-3016

Authorized officer

Catarina Forssén

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IE 94/00062

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,A	AU, B5, 687/93 (J.D. BRADY), 12 May 1994 (12.05.94), page 2, line 17 - line 24, figure 1 --	1
P,A	WO, A1, 9422295 (SURGE MIYAWAKI CO., LTD.), 13 October 1994 (13.10.94), figures 12a, 12b, abstract --	1
P,A	Patent Abstracts of Japan, Vol 94, No 10, -, abstract of JP, A, 6-276877 (SAAJI MIYAWAKI KK), 4 October 1994 (04.10.94), the whole document --	1
P,A	DE, A1, 4317340 (SPIESSHOFER G), 1 December 1994 (01.12.94), the whole document --	1
P,A	AU, A, 9463038 (FINLAYSON D E ET AL), 17 November 1994 (17.11.94), the whole document -- -----	1

S/ 02025

INTERNATIONAL SEARCH REPORT
Information on patent family members

25/02/95

International application No.
PCT/IE 94/00062

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A- 4262632	21/04/81	NONE	
WO-A1- 9305648	01/04/93	AU-A- 2502992 EP-A- 0608250	27/04/93 03/08/94
NL-A- 9201527	05/04/94	NONE	
AU-B5- 687/93	12/05/94	NONE	
WO-A1- 9422295	13/10/94	NONE	
DE-A1- 4317340	01/12/94	NONE	
AU-A- 9463038	17/11/94	NONE	